



# Ace India Infrastructure

## *Our Service*

- Prefabricated cabin
- Shelters
- Porta Cabin
- Steel structure
- Wall
- LGFS
- Guard Room
- Side Office
- Prefab School
- Prefab Cottage
- Container Office
- Labour Camp
- Pre-Fabricated house
- Mobile Toilet
- Project Office
- Labour Hutment
- Prefab House
- Schools
- Container
- Sandwich Panel
- Mobile Toilet
- Project Office
- Labour Hutments



GuardRoom



Mobile Toilet



Steel Panel Cabin



# Shop



# Container Office



# Cottage



# Steel structure





## Specification

**Structure** :- work for roofing structure comprising of MS Tubular sections of size 72x72x2mm and 60x40x2mm, 40x40x2mm with the system of purling and portals

**Roof** :- Supply of roof will constitute of Metallic color coated profiled sheets in 0.5mm thickness, duly secured using SDST Screw of size-12/25 and 12/55 with epdm washers and further sealed with silicone rubber for added water protection

**Walls** :- the walls will be made out of Steel -e.p.s. –Steel composite panels with skin locking systems. The e.p.s used as the core will be of self-extinguishing type. The overall thickness of the Panel will be 75mm.


**Window** :- will be made out of Aluminum Powder Coated Sliding type with 5mm normal clear glass with all fitments

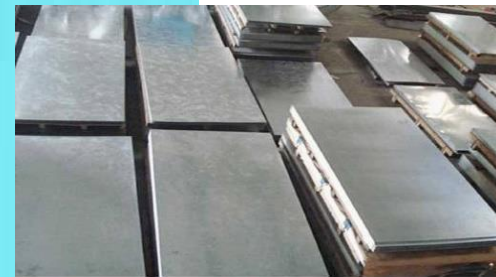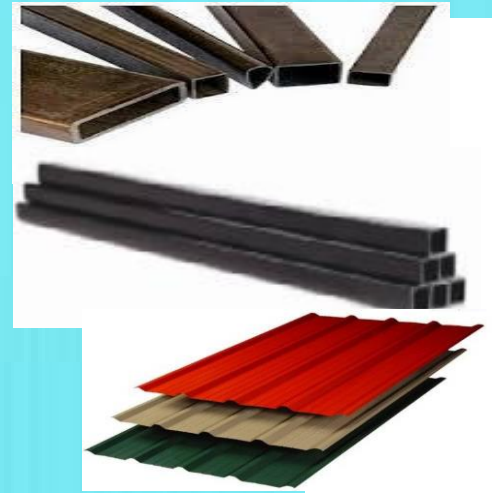

**Door :-** will be commercial flush type including all fixtures supported with MS door jammers of 75mm. The thickness of the door will be 32mm. The doors will be finished with enamel paint in any desired shade



**False Ceiling** - supply and installation of false ceiling will be of grid type. Ceiling tiles will be of mineral fiber ceiling tiles of size 600 x 600mm. As per required by the client.

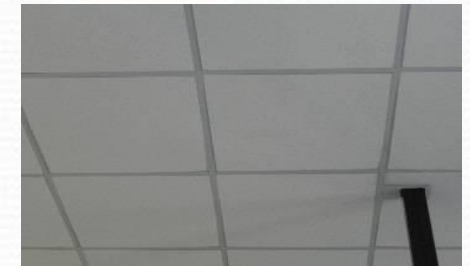


**False Flooring**- will be made out of MS Tubes of size - 60x40, 100x100 and 72x72mm with grid system covered with 19mm board.



**Toilet:-** The washroom and toilets shall be fully furnished with all the basic fittings which includes the followings;



**Electric:-** Wiring, Distribution Boxes Switches, sockets, Plug point, boards and plates, Distribution boxes, electrical cables, M.C.B including all the lamp, luminaries and fans.

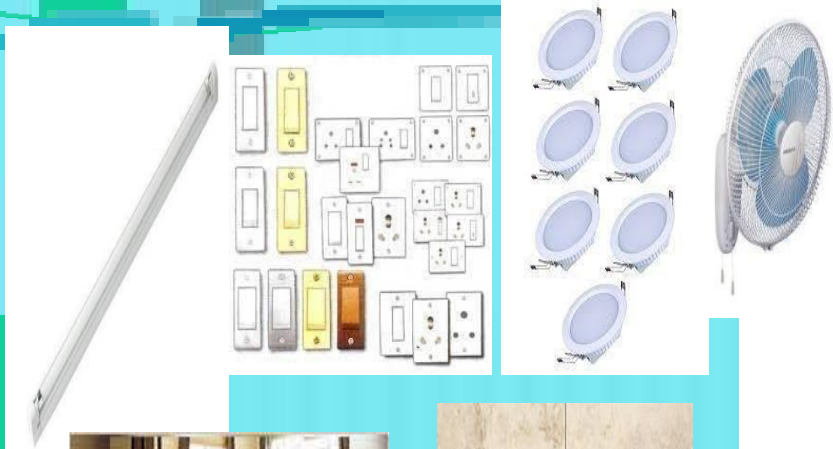

**Floor:-** Ceramic tiles and vitrified tiles floor shall be laid on the cement Fiber board with the cement bonding materials with the appropriate level. The Ceramic floor tiles shall be branded quality.




## ACE INDIA INFRASTRUCTURE

**Head Office – Head Office -T38 Sector 109 Gurgaon -Branch office- Plot No.27, Millat Nagar, Bandha Road Near By Millat Madrasa, Faizullaganj, Phase 2, Lucknow - 226021, Uttar Pradesh, India**

**CONTACT.Mob. No.+91-6394917327/+91-7607508389/+91-9454964213**

**Email – [aceindiainfrastructure250@gmail.com](mailto:aceindiainfrastructure250@gmail.com),  
[ansarahmad0336@gmail.com](mailto:ansarahmad0336@gmail.com),[info@aceindiainfra.com](mailto:info@aceindiainfra.com)**

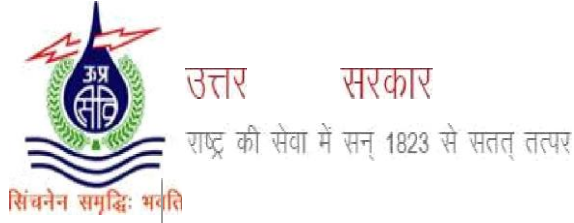

उत्तर सरकार

राष्ट्र की सेवा में सन् 1823 से सतत् तत्पर

सिंचनेन समृद्धिः भवति

सिंचाई एवं जल संसाधन



विभाग

SPO







